


Deep River Outfall Sewer High Point, NC



PROJECT OVERVIEW AND CHALLENGES

This project involved the utilization of two tunneling methods: hand mine drill & blast, and a TBM capable of mining through hard rock conditions. For the most part the 1,000' TBM run was self-supporting, but some of the weaker zones required rock bolts, roof channels, and even liner-plates for a short reach. Two drill and blast road crossings totaling 400' were completed on this job. Both drill and blast tunnels used horseshoe rib and board supports, with a 96" vertical ID. The final lining consisted of 60" of Hobas pipe which was blocked in place and backfilled with fly-ash cement grout. Ground conditions primarily consisted of hard, crystalline metamorphic and igneous rock (gneiss and granite).

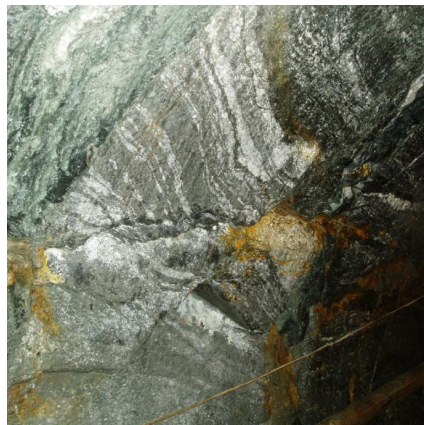

PROJECT INFORMATION - 430

OWNER:

City of High Point, NC
Greg Hall
336.883.3168

ENGINEER:

DMP
Robert Davis, Project Manager
336.886.4821

CONTRACTOR:

Thalle Construction Co., Inc.

COMPLETION DATE:

9/30/2005

GEOLOGY:

Hard Gneiss, Granite Rock

EXCAVATION METHOD:

Jarva TBM 82" Ø
Hand Mine: Drill & Blast

MINING DIMENSIONS:

1,000' x 82" Ø; 400' x 96" Ø

FINAL LINING:

60" Hobas

FOR MORE INFORMATION:

Eric Eisold, Vice President
410.970.8300
eeisold@bradshawcc.com
Refer to Project 430